

FEATURES

GU10 Landscape spike light
Stainless steel - IP65

Diameter 60mm
Depth 113mm
Spike length 140mm

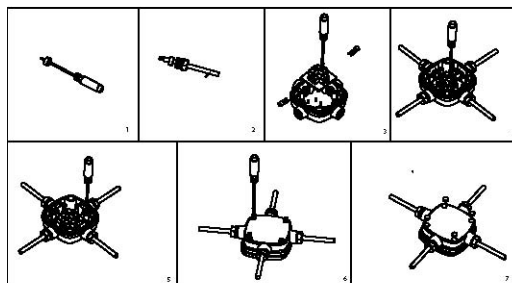


Figure 2

WARNING

This product must be wired as described below. Read these instructions fully and carefully.

GENERAL

Thank you for purchasing a quality SI-LITE product. This product has been designed, developed and tested to our strict codes & standards.

IMPORTANT INFORMATION

Installation should be carried out in accordance with IEE wiring regulations. Always disconnect the mains supply before installation. Connect the driver to the mains supply ensuring that it is protected by a fused connection unit. Make sure all electrical connections are tight. Install the fitting as described below. Never handle hot lamps.

ASSEMBLY INSTRUCTIONS

1. Isolate the mains supply before installation.
2. Unscrew the top to insert a GU10 (max. 50w) lamp.
3. This product is for mains 220-240v only.
4. Open the attached junction box and wire your Live, Neutral & Earth wires to the appropriate position in the terminal block. Screw the enclosed cable holder to the appropriate holes inside the junction box to ensure the cable is held firmly.
5. Insert lamp and screw the top back in place. Do not overtighten, as this may affect the waterproofing of the inner gasket.
6. For multiple connections use SI-LITE JBOX1 (IP68 junction box) see fig 2.
7. Make a suitable water proof connection in compliance with I.E.E wiring regulations. Connections should be tight with no loose strands and a fused connection unit with 3 amps should protect the origin of the circuit.
8. Now you can switch on the supply.
9. If in doubt, contact a qualified electrician.

NOTE: if cable is to be buried it should be protected by conduit or similar protective material.

GUARANTEE

This product is guaranteed for a period of 1 year from the date of purchase. The guarantee is invalid in the case of improper use, improper installation or tampering. Should the product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. SI-LITE is not responsible for any costs associated with the replacement of this product.