

Installation Instructions

S72D / S72DB

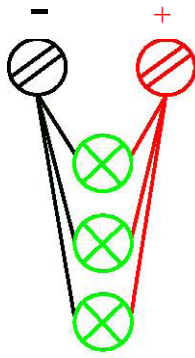


Figure 1



FEATURES

MR16 & GU/GZ10 Landscape spike light
Stainless steel marine grade 316 IP65
Requires a driver for LED lamps. Requires a transformer for 12v
Diameter 62mm
Depth 92mm
Spike length 200mm
Finish: S72D Stainless Steel
S72DB Black

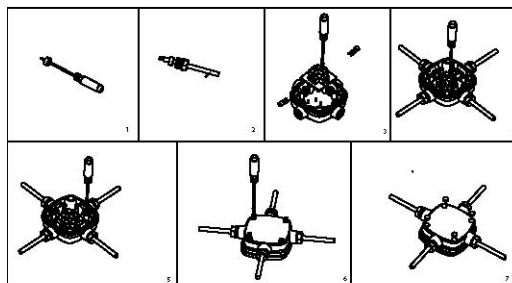


Figure 2



WARNING

This product must be wired as described below. Read these instructions fully and carefully.

GENERAL

Thank you for purchasing a quality SI-LITE product. This product has been designed, developed and tested to our strict codes & standards.

IMPORTANT INFORMATION

Installation should be carried out in accordance with IEE wiring regulations. Always disconnect the mains supply before installation. Connect the driver to the mains supply ensuring that it is protected by a fused connection unit. Make sure all electrical connections are tight. Install the fitting as described below. Never handle hot lamps.

ASSEMBLY INSTRUCTIONS

1. Isolate the mains supply before installation.
2. Unscrew the front bezel and remove lamp holders GX5.3 (12v) and GZ10LH (240v)
3. This product is "dual" usage, meaning it is suitable for either mains voltage (240v) or low voltage (12v)
4. Choose the lamp holder you require (MR16 12v or GU10 240v) and wire to cables inside the product - the lamp holders are polarity free.
5. Insert lamp and screw front bezel back in place. Do not overtighten, as this may affect the waterproofing of the inner gasket.
6. For multiple connections use SI-LITE JBOX1 (IP68 junction box) see fig 2.
7. Make a suitable water proof connection in compliance with I.E.E wiring regulations. Connections should be tight with no loose strands and fused connection unit with 3 amps should protect the origin of the circuit.
8. Now you can switch on the supply.
9. If in doubt, contact a qualified electrician.

NOTE: if cable is to be buried it should be protected by conduit or similar protective material.

GUARANTEE

This product is guaranteed for a period of 1 year from the date of purchase. The guarantee is invalid in the case of improper use, improper installation or tampering. Should the product fail during the guarantee period it will be replaced free of charge, subject to correct installation and return of the faulty unit. SI-LITE is not responsible for any costs associated with the replacement of this product.